


IA/MP1 Tarjeta PCI con tarjeta MiniPCI

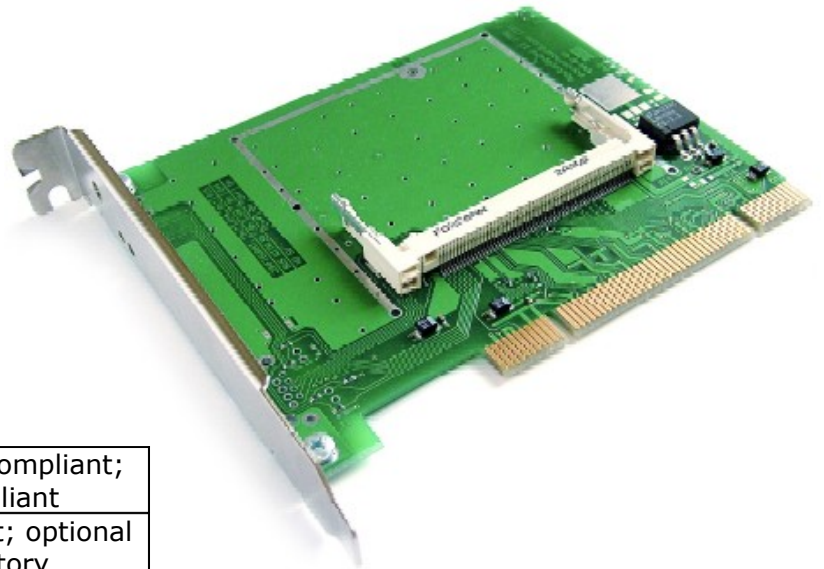

Specifications

Standards:	MiniPCI v1.0 standard compliant; PCI v2.1 and v2.2 compliant
Operation Voltage:	PCI 3.3v and 5v support; optional - 3.3v only support (factory option - RouterBOARD 11-3.3)
Input Power:	Up to 5w of 3.3v power supplied to MiniPCI card; optional - 3.3v (5w) out header (factory option - RouterBOARD 11-h)
LED:	Two LEDs connected to MiniPCI (according to standards)
Operation Temp.:	0o C to 70o C (32oF to 158oF)
Storage Temp.:	-20o C to 80oC (-4oF to 176oF)
Humidity Range:	0% to 90%
Mounting:	Mounting for optional tin shield
Dimensions:	9,6 x 12,2cm (3,78 x 4,1in)

Distribuidor autorizado:

Mikrotik-México
info@index.com.mx
www.mikrotik-mexico.com.mx

Ignacio Zaragoza 444 Nte. Despacho 511
Edificio San Isidro Col. Centro. Los Mochis Sinaloa.
Tel./Fax.01(668)812-52-12, 01-800-716-0708